#4

Attorney Docket No. DYOUP0211US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT application of:

Applicant(s):	David John Richardson et al.
Serial No:	09/802,745
Filed:	March 8, 2001
Title:	OPTICAL TRANSMISSION SYSTEM AND METHOD

SUBMISSION OF PRIORITY DOCUMENT(S)

Assistant Commissioner for Patents
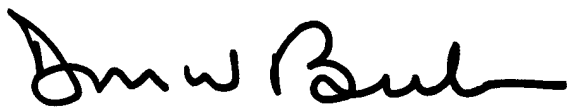Washington, D.C. 20231

Dear Sir:

Regarding applicant's claim to convention priority, enclosed herewith is/are

certified copy/copies of the following priority application(s):

UK 0005615.0 filed 9 March 2000

Please acknowledge receipt of the enclosed priority document(s).

Respectfully submitted,
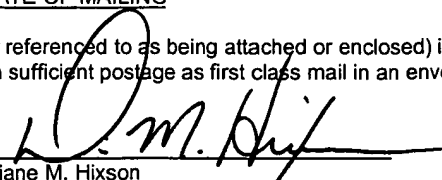
RENNER, OTTO, BOISSELLE & SKLAR LLP

By_____
Don W. Bulson, Reg. No. 28,192

1621 Euclid Avenue
Nineteenth Floor
Cleveland, Ohio 44115
(216) 621-1113

CERTIFICATE OF MAILING

I hereby certify that this correspondence (along with any paper referenced to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to Assistant Commissioner for Patents, Washington, D.C. 20231.

Date: 7-24-01

Diane M. Hixson

C:\152\DWB\DYOU\P0211\P0211US.P03.wpd (SPD-F.FRM 4/97)

THIS PAGE BLANK (USPTO)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-gistration save for the substitution as, or inclusion as, the last part of the name of the words ublic limited company" or their equivalents in Welsh, references to the name of the company his certificate and any accompanying documents shall be treated as references to the name which it is so re-registered.

ordance with the rules, the words "public limited company" may be replaced by p.l.c., L.C. or PLC.

Re   tration under the Companies Act does not constitute a new legal entity but merely sub   he company to certain additional company law rules.

Signed   *[signature]*

Dated   16 March 2001

THIS PAGE BLANK (USPTO)

Patents Form 1/77

Patents Act 1977
(Rule 16)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
A

- 9 MAR 2000

RECEIVED BY FAX

09MAR00 E519775-1 C03973
P01/7700 0.00-0005615.0
~~The Patent Of~~

The Patent Of

Cardiff Road
Newport
Gwent NP9 1RJ

1. Your reference

~~1816~~ P010136GB MJH.

2. Patent application number
   (The Patent Office will fill in this part)

0005615.0

- 9 MAR 2000

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

UNIVERSITY OF SOUTHAMPTON
~~HIGH~~ HIGHFIELD
SOUTHAMPTON
SO17 1BJ.
79847000 1
UNITED KINGDOM

Patents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

AN OPTICAL PROCESSING DEVICE BASED ON FIBER GRATING.

5. Name of your agent *(if you have one)*

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*

D. YOUNG + CO.
21 NEW FETTER LANE
LONDON
EC4A 1DA

Patents ADP number *(if you know it)* 59006.

INNOVATION AND RESEARCH SUPPOR
~~UNIVERSITY OF SOUTHAMPTON~~
~~HIGHFIELD~~
~~SOUTHAMPTON~~
~~SO17 1BJ~~ ~~7291479001~~

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country	Priority application number *(if you know it)*	Date of filing *(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing *(day / month / year)*

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*
   a) *any applicant named in part 3 is not an inventor, or*
   b) *there is an inventor who is not named as an applicant, or*
   c) *any named applicant is a corporate body.*
   See note (d))

YES

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the
   following items you are filing with this form.
   Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) ✓

Abstract 1

Drawing(s) 7

---

10. If you are also filing any of the following,
    state how many against each item.

Priority documents ✓

Translations of priority documents ✓

Statement of inventorship and right
to grant of a patent (Patents Form 7/77) ✓

Request for preliminary examination
and search (Patents Form 9/77) ✓

Request for substantive examination
(Patents Form 10/77) ✓

Any other documents ✓
(please specify)

11.

I/We request the grant of a patent on the basis of this applicatio

Signature _____ Date 9/3/00

---

12. Name and daytime telephone number of
    person to contact in the United Kingdom MYLENE PLOYAERT 02380 594680

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*

b) *Write your answers in capital letters using black ink or you may type them.*

c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*

d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*

e) *Once you have filled in the form you must remember to sign and date it.*

f) *For details of the fee and ways to pay please contact the Patent Office.*

Patents Form 1/7

An Optical Processing Device

A 10 Gbit/s, 160 Gchip/s OCDMA coding:decoding system based on superstructured fiber gratings

based on Fiber grating

Abstract

We report the operation of a 10 Gbit/s, 160 Gchip/s OCDMA unipolar:bipolar coding:decoding system based on superstructured fiber gratings. Error free operation over a transmission distance of 25km of standard fiber is demonstrated with no power penalty.

limited pulse conversion, soliton to super-Gaussian pulses, soliton to dispersion managed solitons, Gaussian pulses to square pulses.

14. Extend the grating bandwidths of code-decode grating to up to 200nm or further
15. Extend technique to other wavelength regimes in the range 700nm to 2000nm or further
16. Extend the superstructure decoding technique to correlate (provide matched filtering) directly with the output form a modulated optical source. For example the source can be a directly modulated gain-switched diode, and externally modulated DFB laser, a mode-locked fibre ring laser with external modulation
17. Addition of wavelength division multiplexers and demultiplexers such as arrayed waveguide gratings to facilitate multi-wavelength operation, with one or more wavelengths being operated under the code-division multiplexing technique described previously.
18. Operation of the system with synchronous transmitters and receivers
19. Operation of the system with asynchronous transmitters and receivers
20. Operation of the system with a combination of synchronous and asynchronous transmitters and receivers

This invention can either be viewed as a grating for use in CDM system architectures, a method of using gratings in CDM system architectures, a CDM architecture for optical communications, or a combined CDM and WDM system architecture for optical communications.

By CDM we mean code-division multiplexing systems but also mean ultrafast packet-switched, or other OTDM networks or transmissions systems.

The apparatus can also include one or more of the following features:

1. Incorporation of both dispersion-compensating and encoding or decoding gratings into a single superstructure grating
2. Addition of multiple codes within a single grating – for example two codes at different central wavelengths
3. Further extension of either the grating length or reduction in chip size to increase the code length to codes of greater than 5000 chips, or more, allowing rapid increases in simultaneous users
4. More complex superstructure profiles including amplitude and phase features to shape controllably the individual chip shapes
5. Incorporation of simultaneous additional, multiple functionality within a single grating (decoding/coding) structures eg loss compensation and dispersion compensation (2^{nd} and 3^{rd} order)
6. The apparatus may be reconfigured such that the superstructure grating as above is used in transmission mode rather than reflective mode
7. To use higher reflectivity versions of the decoder/coder gratings designed using more advanced design algorithms (eg inverse scattering techniques) other than by the Fourier approach
8. To use cascades of one or more code/decode gratings
9. Use advanced codes such as those developed by the mobile-communications community for optimized correlation function definition eg M-sequences, Gold sequences or Kasami codes
10. Use a combination of a decoder grating and nonlinear element such as a semiconductor optical amplifier or fibre-based nonlinear switch to enhance the correlation signal contrast and effect further enhanced processing functions such as optical routing, header removal and rewrite, data packet loading.
11. Use parallel arrays of coder-decoder gratings to enhance multi-user operation
12. Use of coder/decoder approach to allow reduction of nonlinear optical effects by extending the bit duration in the time domain, thereby reducing optical intensities
13. Use superstructured gratings to shape optical pulses (that may be of a non-optimal form) for a given transmission technique or optical processing function to a more-desirable functional form for onward transmission or processing, eg chirped pulse to transform

Conclusions

- Superstructure FBG technology enables high coding/decoding performance

- Flexibility in code design and device fabrication - code profile is determined by appropriate UV exposure, not phase mask

- Direct comparison of unipolar vs. bipolar operation

- Error-free 10Gbit/s pulse coding/decoding over 25km of SMF with 160Gchip/s code

- 255-chip or longer codes possible using cm-long FBG's and shorter chip durations

- Applications: OCDMA, header recognition in packet-switched networks, etc.

Objectives of this work

- **Extend technique to higher data and chip rates**
  - * 10Gbit/s vs. 125Mbit/s
  - * 160Gchip/s vs. 4Gchip/s
- **Compare unipolar with bipolar coding**
- **Increase FBG reflectivity**
- **BER tests**
- **Code transmission over 25km of standard fibre link with FBG-based dispersion compensation**
- **Demonstrate precision and flexibility of FBG writing process**

networks. For example our results demonstrate the possibility of using FBGs for header recognition in 160 Gbit/s OTDM based networks.

References
[1] N. Karafolas Opt. Fiber Technol., 2. pp149-168, (1996)
[2] H.Tsuda et al.: Electron. Letts., 35, pp1187-1188, (1999)
[3] N. Wada et al.: IEEE J. Lightwave Technology, 17, pp1758-1765, (1999)
[4] H. Fathallah et al.: IEEE J. Lightwave Technology, 17, pp397-405, (1999)
[5] J. Salehi et al. IEEE J. Lightwave Technology, 17, pp478-491, (1990)
[6] L.R. Chen et al. Applied Optics, 38, pp4500-4508, (1999)
[7] H.Geiger et al.: Proc. ECOC'98, Vol.1, pp337-338 (1998)
[8] A.Grunnet-Jepsen et al.: IEEE Photon Technol. Letts.. 11, 1283-1285, (1999)
[9] M. Ibsen et al: IEEE Phot. Tech. Lett. 10, 842 (1998)

Fig.1 Experimental set-up.

Fig.2 (a) Unipolar grating reflectivity spectrum (theoretical and experimental). The refractive index superstructure is shown inset. The peak reflectivity of this grating was ~3%.
(b) Bipolar grating reflectivity spectrum (theoretical and experimental). The refractive index superstructure is shown inset. The peak reflectivity of this grating was ~50%.

Fig.3 (a) Theoretical and experimental pulse intensity autocorrelation functions for the code:decode process for both the unipolar and bipolar grating pairs. (b) Theoretical and experimental pulse intensity autocorrelation functions for the code:decode process both before and after transmission through 25km of (dispersion compensated) standard fiber.
5 (a and b)
Fig.4 BER curves for back to back, and code:decode before and after transmission. Corresponding eye diagrams are shown inset.

We fabricated a matched pair of both unipolar and bipolar seven-chip M-sequence, coding/decoding gratings. The unipolar gratings were similar in design to those used in our earlier experiments [7], only physically much shorter in length. The total grating length in each instance was 4.64mm (corresponding to a temporal code length of 44.8ps) and the individual chip width was 0.66mm (corresponding to a chip length of 6.4ps). Note that grating phase control can be maintained over lengths of order 10cm allowing for considerably longer code sequences than demonstrated herein. The amplitude-modulated superstructure profile used to write the unipolar code grating is shown inset in Fig.2a along with the corresponding theoretical and experimental power reflectivity profiles. The bipolar grating design is shown inset in Fig.2b, and is a pure phase-encoded structure with discrete π phase shifts at the (NRZ) chip transition boundaries. The experimental and theoretical plots are shown in Fig.2b. The agreement between the theoretical and experimental spectral responses of both FBG types is seen to be excellent, highlighting the precision of our grating writing process. Note that all of the gratings used in these experiments (including the dispersion compensating FBG) were written by appropriate UV exposure through the same, uniform period phase mask. The decode gratings in both instances are essentially identical to the encoder gratings other than that they have a spatially-reversed refractive index superstructure.

Since our gratings are still relatively weak we are in the Fourier theory grating design limit, such that the impulse response of the grating in the time domain is essentially given by the superstructure modulation profile used to write the grating. We examined the intensity autocorrelation functions of the incident 2ps pulses on reflection from the individual coding/decoding gratings, and found the profiles to be in excellent agreement with our theoretical predictions. In Fig.3 we plot the experimental and theoretical intensity autocorrelations functions of the decoder response to the incident code patterns for both the unipolar and polar cases respectively. The agreement is seen to be excellent in both cases. The system benefits of using the bipolar gratings due to the interferometric background cancellation are self-evident. In Fig.4 we plot the decoder response to the code after it has propagated over the 25km dispersion-compensated transmission line, there is evidence of some correlation signal degradation, however the effects are slight, and in fact negligible in terms of overall system performance.

We performed BER measurements on the coding:decoding process for the bipolar grating, both with and without the 25km transmission. The results are summarised in Fig.5 where it is seen that no power penalty associated with code-decode process is observed in either instance. Eye diagrams for both the simple code:decode and transmitted code:decode case are shown inset within Fig.5. As expected no evidence of temporal features away from the main, chip-length long, correlation peak is observed.

A 10 Gbit/s, 160 Gchip/s OCDMA coding:decoding system based on superstructured fiber gratings

The area of Optical Code Division Multiple Access (OCDMA) systems has received steadily growing interest in recent years [1-8]. OCDMA offers a number of attractive features for future local area networks including higher connectivity, asynchronous multiple-access and more flexible bandwidth management. Much of the increased activity in this area has resulted from improvements in Fiber Bragg Grating (FBG) fabrication technology driven mainly by the stringent requirements of DWDM. It is now possible to design and reliably fabricate superstructured FBGs with truly complex amplitude and phase responses [9], opening up the possibility of using FBG components to perform fundamental OCDMA functions such as the coding and decoding of chip patterns described herein. Superstructured gratings offer advantages in terms of compactness, scalability, integrability, cost and ease of manufacture relative to competing technological approaches. These alternative approaches include the use of: arrayed waveguide gratings [2], fiber delay line arrays [3], arrays of discrete FBGs [4], and bulk-grating based systems incorporating some form of spatial light modulator [5].

In earlier work we demonstrated the generation of seven-chip, direct sequence, unipolar code OCDMA bits at 125 MHz using a superstructured FBG, and demonstrated optical pattern recognition using a matched FBG filter as a decoder [7]. The general approach has been extended more recently by other authors to bipolar (phase) encoding, resulting in improved code correlation signatures [8]. The repetition rate in these more recent experiments was 20MHz with a chip duration of ~30ps. The FBGs used were of a segmented composite form written through a specially patterned phase mask and had a reflectivity of just 1%.

In this paper we present results on upgrading the superstructure grating approach to both far higher data rates (10 Gbit/s), far shorter chip-lengths (6.4ps) and far higher grating reflectivities (up to 50%) than previously demonstrated. We demonstrate the flexibility and precision of our continuous scanning fiber/phase mask technique by fabricating both unipolar and bipolar coding and decoding gratings with close to the theoretically designed spectral response, and time domain performance characteristics. We present the results of BER measurements at 10 Gbit/s on a decoded pulse sequence both before and after transmission through 25km of standard fiber which show there to be no noise-penalty associated with either the coding:decoding process, or the transmission of the coded pulse itself.

Our experimental set-up is shown in Fig.1 and comprises a 10 Gbit/s, ~2ps pulse transmitter (based on a regeneratively mode-locked, soliton fiber ring laser operating at 10 GHz), coding and decoding gratings, and an (optional) 25km standard fiber transmission span which had its dispersion compensated with a chirped FBG.
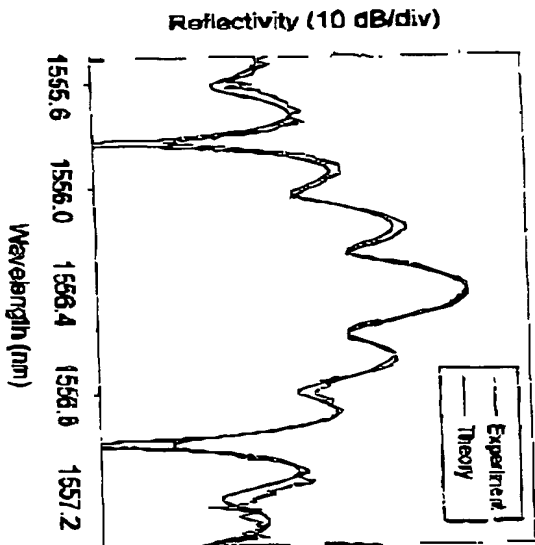
(FIGURE 1)

Experimental set-up
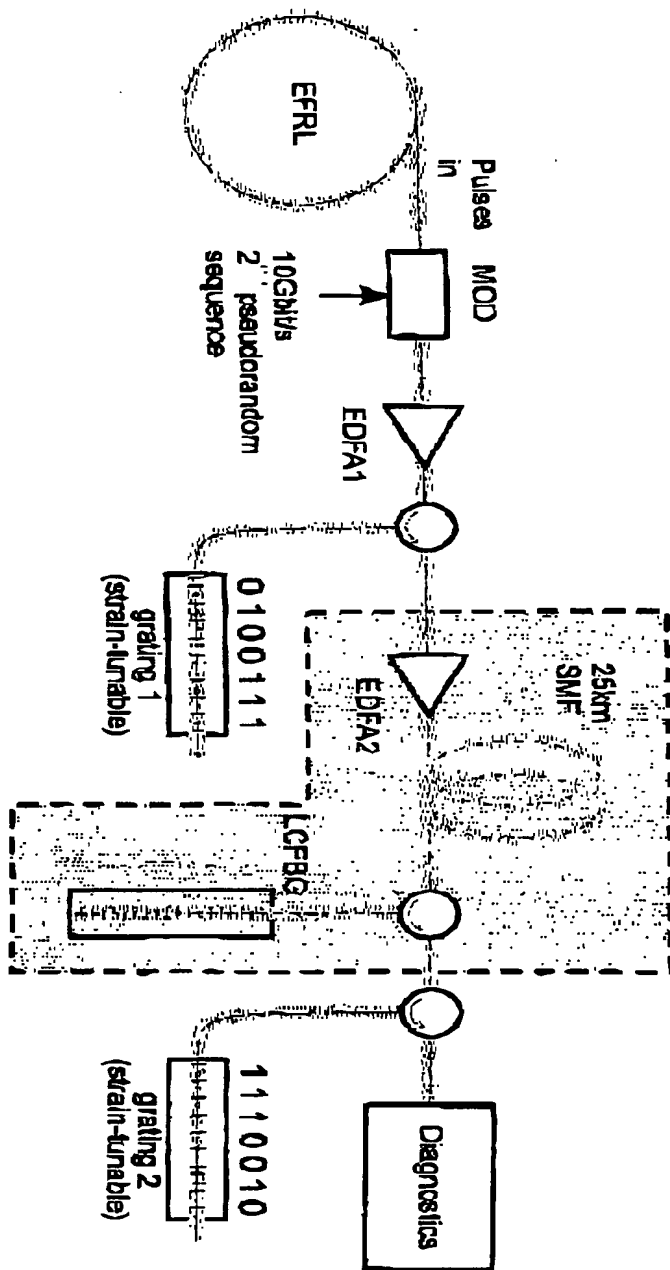
- **Source: Actively, harmonically mode-locked erbium fibre ring laser (2ps soliton pulses at 10GHz)**
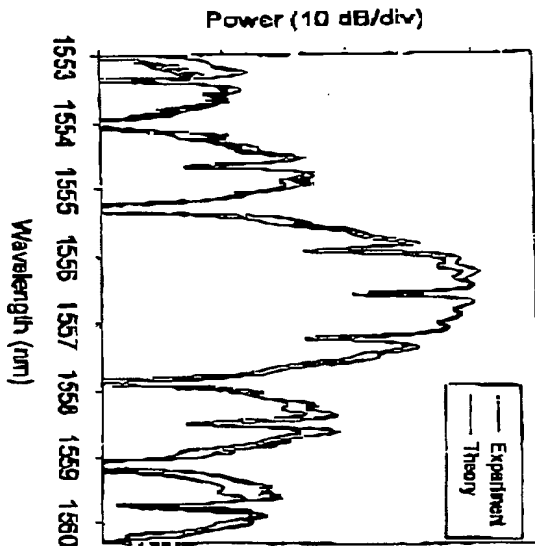- **Transmission over 25km of standard SMF**

Coding/Decoding gratings

(a) **Unipolar code**
~3% reflective

Reflectivity (10 dB/div)

1555.6 1556.0 1556.4 1556.8 1557.2
Wavelength (nm)

Experiment
Theory

1 1 0 0 1 0

L_{chip}

(b) **Bipolar code**
~50% reflective

Power (10 dB/div)

1553 1554 1555 1556 1557 1558 1559 1560
Wavelength (nm)

Experiment
Theory

0 0 0 π π 0 π

- **Chip duration** $\tau_{chip} = 2 \cdot n \cdot L_{chip}/c = 6.4ps$
- **Duration of codes = 44.8ps**
- **Total grating length = 4.64mm, chip length L_{chip} = 0.66mm**
- All FBG's fabricated using a single uniform-pitch phase mask

Intensity autocorrelation of decoded signals

(FIGURE 3)

Unipolar code

SHG Intensity (norm. un.)

Time delay (ps)

— Experiment
— Theory

Bipolar code

SHG intensity (norm.un.)

Time delay (ps)
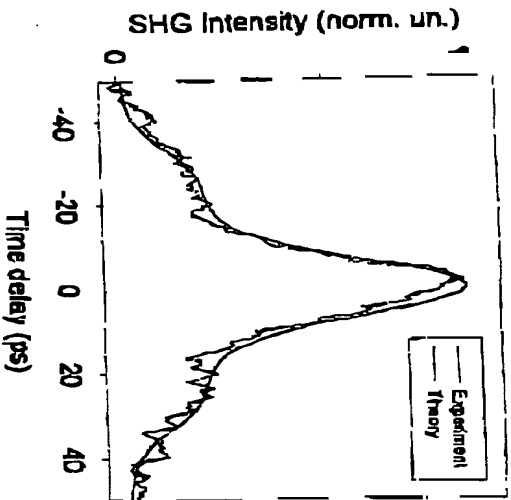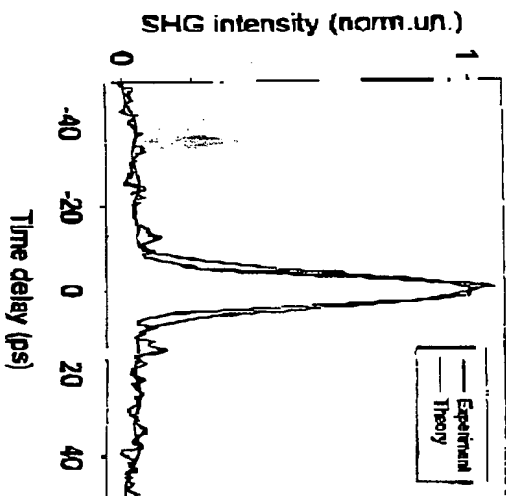
— Experiment
— Theory

- Good agreement between predicted and experimental waveforms

- Duration of decoded signal = 2 × duration of code = 98.6ps

- Bipolar coding: better background suppression; hence, better signal definition

THIS PAGE BLANK (USPTO)

Transmission of code over 25Km

(FIGURE 4)

Intensity SHG (norm. un.)

Legend:
- Decoded signal 25km
- Decoded signal 0km
- theoretical ACF

Time delay (ps)

BER

Legend:
- Decoded signal, 0km
- Decoded signal, 25km
- Back-to-back

Received Power (dBm)
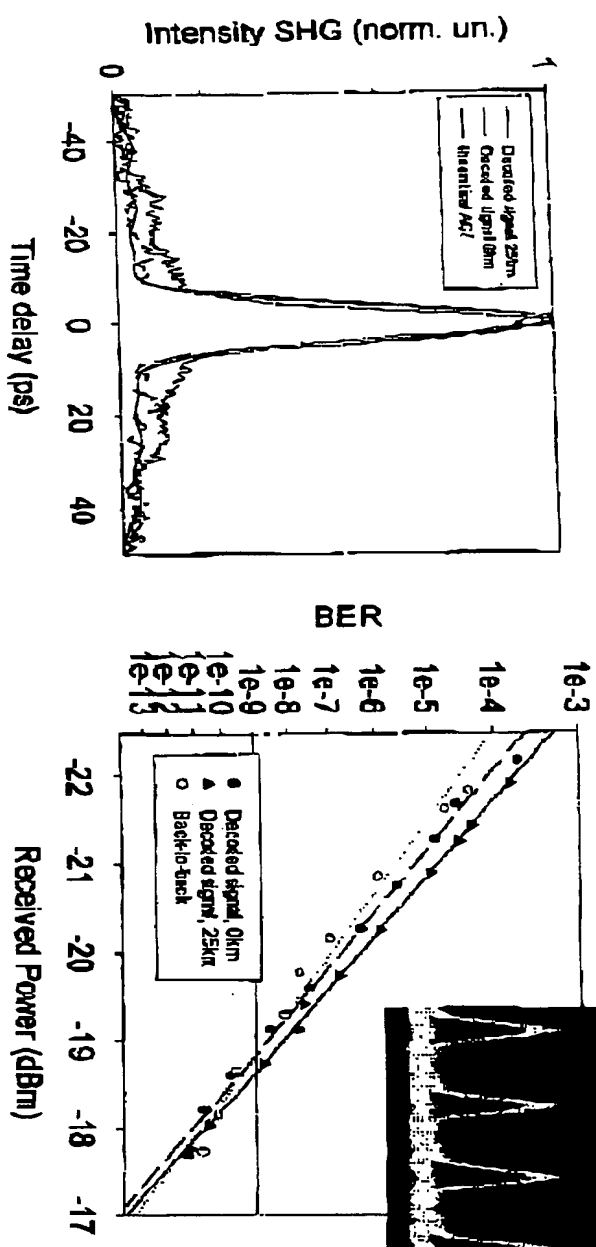
(FIGURE 5a)

- **25km of standard single-mode fibre**
- **Dispersion compensation using linearly chirped FBG**

THIS PAGE BLANK (USPTO)

FIGURE 56

Bipolar coding - BER test

BER

1e-3
1e-4
1e-5
1e-6
1e-7
1e-8
1e-9
1e-10
1e-11
1e-12
1e-13

-22   -21   -20   -19   -18   -17

Received Power (dBm)

● Back-to-back
○ Decoded signal

Laser pulses

Decoded signal
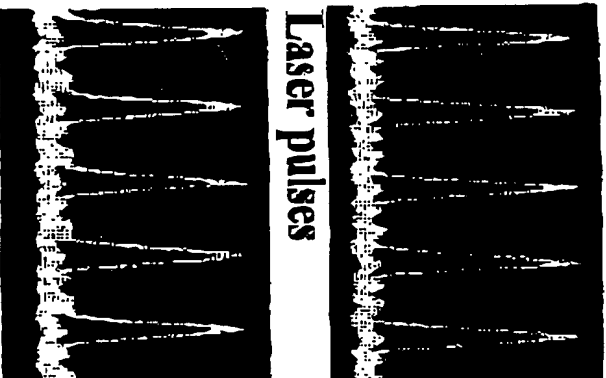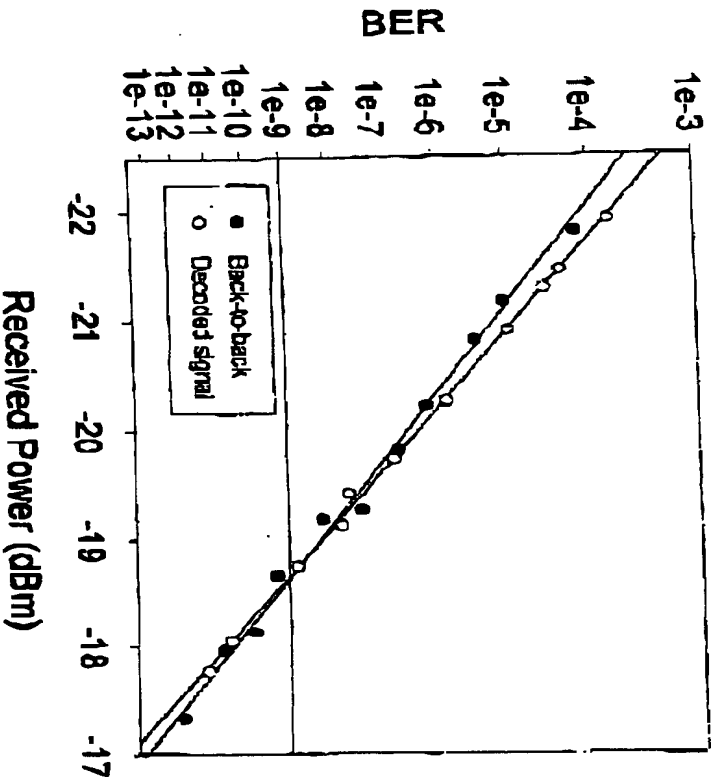
- **2³¹-1 pseudorandom bit sequence**
- **No noise penalty**
- **Error-free operation; no noise floor at 10Gbit/s**

THIS PAGE BLANK (USPTO)

Fig A

(CODED)
SIGNAL
IN

OPTICAL
SPLITTER
(e.g. 3dB
coupler)

OPTICAL
DELAY
LINE

OPTICAL
SWITCH / FILTER / MODULATOR
routed etc

OPTICALLY
PROCESSED
OUTPUT

ELECTRICAL
FEED
(control

OPTICAL CIRCULATOR

O/E
CONVERTER

NONLINEAR
ELEMENT

ONE OR MORE
DROP/ADD GRATINGS

ELECTRONIC
DECISION
CIRCUIT

"CODING / DECODING GRATINGS AND A NONLINEAR ELEMENT"
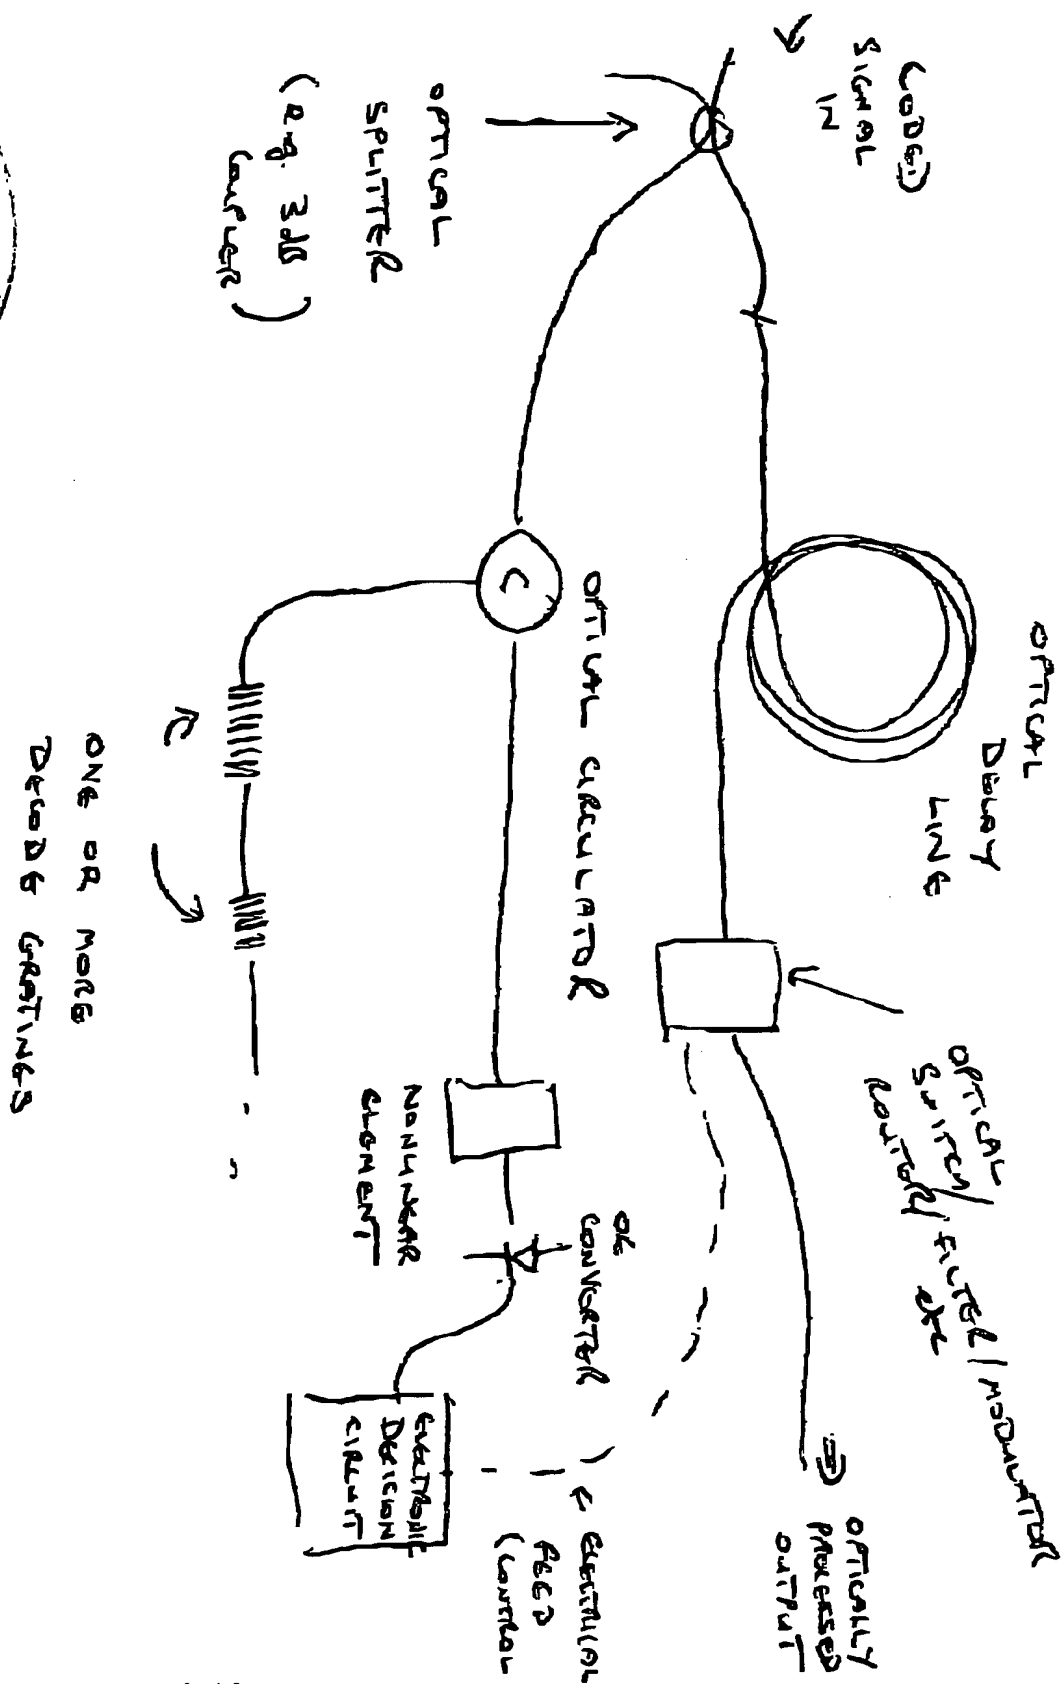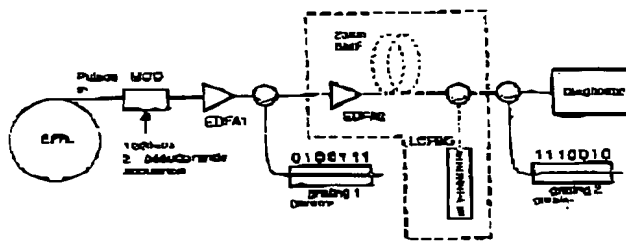
Fig.1 Experimental set-up. The pseudorandom sequence is $2^{31}-1$ bits long. LCFBG: Linearly chirped fibre Bragg grating
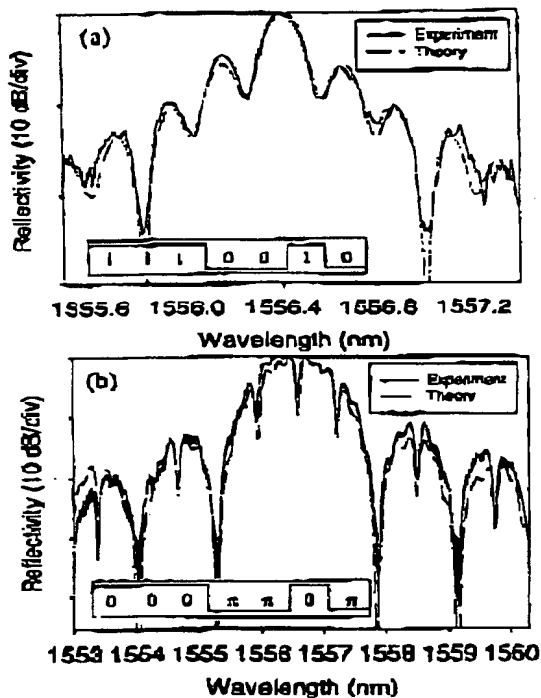
Fig.2 (a) Unipolar grating reflectivity spectrum (theoretical and experimental). The refractive index amplitude superstructure is shown inset. The peak reflectivity of this grating was ~3%. (b) Bipolar grating reflectivity spectrum (theoretical and experimental). The refractive index phase superstructure is shown inset. The peak reflectivity of this grating was ~50%.

Fig.3 Theoretical and experimental pulse intensity autocorrelation functions for the code:decode process for both the unipolar and bipolar grating pairs.

Fig 4 Theoretical and experimental pulse intensity autocorrelation functions for the code:decode process both before and after transmission through 25km of (dispersion compensated) standard fibre.
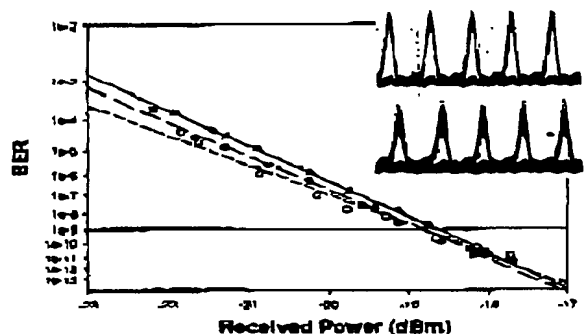
Fig.5 BER curves for back-to-back (open circles), and decoded signal before (closed circles) and after (triangles) transmission: the corresponding eye diagrams are shown inset

(≠ ENLARGED COPIES OF FIGURES APPENDED)